

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number
WO 03/106783 A1

(51) International Patent Classification⁷: **E04F 15/10**,
15/02, D06N 7/00

Paul [GB/GB]; 8 Hampden Hill, Ware, Hertfordshire SG12
7JT (GB).

(21) International Application Number: PCT/GB03/02563

(74) Agent: **PEEL, James, Peter**; Barker Brettell, 10-12
Priests Bridge, London SW15 5JE (GB).

(22) International Filing Date: 16 June 2003 (16.06.2003)

(25) Filing Language:

English

(81) Designated States (*national*): JP, US.

(26) Publication Language:

English

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:
0213686.9 14 June 2002 (14.06.2002) GB

(71) Applicant (*for all designated States except US*): **ALTRO
LIMITED** [GB/GB]; Works Road, Letchworth, Hertford-
shire SG6 1NW (GB).

Published:


— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **GARDNER, Donald**,

(54) Title: LOOSE LAID VENTILATING DECORATIVE FLOOR COVERING

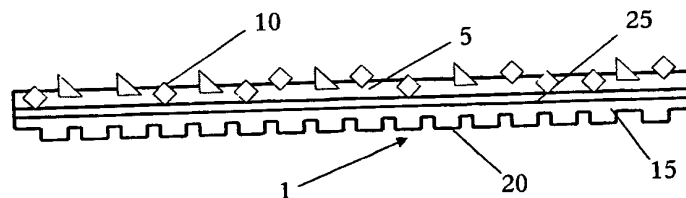

(57) Abstract: According to the invention there is provided a ventilating decorative floor covering (1) for loose laying on the upper surface of a floor, which floor covering has a decorative upper surface (5) and a lower surface (15) on which are formed one or more studs (20) which, in use, provide an air gap between the lower surface (15) of the floor covering and the upper surface of the floor sufficient to ventilate the floor. The floor covering can be applied to concrete floors which have not completely cured or on contaminated sub-floors, thus negating the need for timely and expensive sub-floor preparation.

WO 03/106783 A1

LOOSE LAID VENTILATING DECORATIVE FLOOR COVERING

The present invention provides a method for the installation of loose laid safety flooring providing the ventilation of newly laid concrete floors and
5 a ventilating floor covering suitable for contaminated and/or uneven sub-floors.

Recently, there has been growing pressure in the construction industry for newly-built and refurbished buildings to be ready for use in shorter
10 periods of time. With new construction methods, it is now possible to construct a new building in a relatively short period of time compared to a few years ago. The time it takes for the concrete used in the construction of the building to cure has now been found to be a limiting factor. The problem is that if a building is furnished before the concrete
15 is cured, the water vapour produced by the concrete in curing causes damp in the building, damaging the furnishings. Another problem experienced by flooring contractors is that of contaminated surfaces, this is a problem more common in refurbished buildings but may occur in new builds also. Contaminants such as oils, minor cracks etc will reduce the effectiveness of adhesives, and can also require expensive preparations of
20 the sub floor before a floor covering is laid.

A way of ameliorating these problems has been sought.

25 According to the invention, there is provided a method of laying a slip resistant floor covering to decorate and ventilate a concrete floor having an upper surface which method includes loose laying on the upper surface of the floor a floor covering having a decorative slip resistant upper surface and a lower surface on which are formed a plurality of studs
30 and/or other suitable profiles which provide an air gap between the lower surface of the floor covering and the upper surface of the floor sufficient

to ventilate the floor. The invention is manufactured to ensure a dimensionally stable floor covering with no curling, shrinkage etc.

5 According to the invention, there is also provided a ventilating decorative floor covering for loose laying on the upper surface of a floor which floor covering has a decorative upper surface and a lower surface on which are formed one or more studs which, in use, provide an air gap between the lower surface of the floor covering and the upper surface of the floor sufficient to ventilate the floor.

10

One advantage of the method of the invention is that by not adhering the floor covering to a substantial portion of the floor and by providing studs on the lower surface of the floor covering, ventilation of the upper surface of the floor is possible such that water vapour produced by the concrete floor during its curing can escape. Thus, the method of the invention can be applied to concrete floors which have not completely cured. The invention also allows the floor covering to be laid on contaminated sub-floors, thus negating the need for timely and expensive sub-floor preparation. As a result, there is less delay between the end of construction of a building and the fitting out of its interior for use by its occupants. The reduction of this delay results in considerable cost savings and increased convenience for both the constructor of the building and its future occupants alike. The invention allows the floor covering to be laid without a primer, adhesive and/or screed, which is an advantage to the environment and minimise any health and safety issues in confined spaces. The lack of adhesive also improves recycling possibilities due to the lack of any residues and allows the floor covering to be easily removed, and the ability to be used as a temporary floor covering.

30 A stud formed on the lower surface of the floor covering may be of any shape or dimension and present in any number per unit area of the floor

covering suitable to ventilate the floor to which the floor covering is to be applied. A stud is optionally in the form of a projecting portion of the lower surface or a profile formed by the lower surface. The floor covering is generally not adhered to the floor to which it is applied in order that the upper surface of the floor is not sealed. This allows water vapour to escape from the upper surface of the floor.

Preferably the floor covering will be a heterogenous plastics floor covering made up from a plurality of layers which preferably include a wear layer. The wear layer may be in the form of a coating, for example as described in WO 00/42274, the contents of which are incorporated by reference.

The lower surface of the floor covering is preferably chemically or mechanically modified to ensure that there is adequate grip between the lower surface of the floor covering and the floor to which it is applied. Optionally the modification is in the form of a softening and/or a roughening of the lower surface. One way in which the lower surface could be roughened is by including a blowing agent in the plastics material from which the lower surface of the floor covering is preferably formed. A suitable blowing agent for this purpose is a gas filled microsphere such as that marketed under the name Expancel by Akzo Nobel. The blowing agent is preferably included in a sufficient amount to roughen the lower surface of the floor covering. To soften the lower surface of the floor covering, the lower surface could include additional plasticiser or a chemical blowing agent such as an azodicarbonamide.

Preferably the floor covering includes one or more particulate materials to provide slip resistance. A particulate material is preferably embedded in the upper surface of the flooring material which material is at least partially proud from the upper surface to achieve adequate slip resistance.

A particulate material is optionally dispersed within the floor covering to improve the non-slip properties further and/or to enhance the wear resistance of the floor covering.

- 5 The floor covering is preferably a plastics flooring material. More preferably the floor covering includes a plastics material which is a PVC, a plasticised PVC, a polyurethane, an epoxy resin, an acrylic, a plasticised acrylic, a polyurefin, a polyester, and/or other suitable thermoplastics. The preferred floor covering includes a plastics material
10 such as a PVC plastisol.

The upper surface of the floor covering may optionally contain decorative elements such as a pigment and/or a PVC chip and any other suitable decorative finish. The floor covering preferably includes a support, more
15 preferably a reinforcing support.

The plastics material used to form the floor covering according to the invention preferably contains and/or is formed from a plastics material as defined above preferably in an amount of 100 to 200 php, a blowing agent
20 (e.g. an azodicarbonamide or a gas filled microsphere such as that marketed under the name Expancel by Akzo Nobel) preferably in an amount from 0 to 2 parts per hundred parts of plastics material (php), filler (e.g. calcium carbonate, magnesium carbonate, talc etc) preferably in an amount of from 0 to 100 php, thermal stabiliser (e.g. an
25 organometal soap stabiliser) preferably in an amount of from 1 to 3 php, pigment (e.g. titanium dioxide suspended in a compatible plasticiser from above) preferably in an amount of from 1 to 3 php. Other additives such as a rheology modifier, biocide, and/or a UV stabiliser may also be used.

30 The floor covering could be produced in a number of ways i.e. wet coating, calendaring and/or any other suitable production method. The

floor covering may be made up of one or more layers of plastics material; preferably up to three layers are envisaged the manufacturing process may occur in stages to produce a single sheet floor covering.

- 5 The particulate material is preferably a grit; more preferably it is one or more of a number of types of hard particles including silicon carbide, a silica (e.g. quartz, a coloured or natural sand or a flint), aluminium oxide, emery and/or any other suitable material.
- 10 The floor covering may optionally further contain quartz, decorative chips or any other decorative additives to add a decorative effect. The floor covering may be embossed to enhance the decorative finish.

The invention is illustrated by a way of example with reference to the
15 following drawings in which:-

Figure 1 shows a cross-sectional view of a floor covering according to the invention; and

- 20 **Figure 2** shows a schematic view of a production line for use in the manufacture of a floor covering according to the invention by a wet coating process.

The floor covering 1 shown in the figure has an upper layer 5 having a decorative surface with surface particulates to improve slip resistance 10,
25 a scrim layer 25 and a lower layer 15 having a surface which is provided with studs or profiles 15. In use, the floor covering is placed on a floor such that the lower surface of the floor covering 1 engages an upper surface of the floor. The studs or profiles 15 allow the movement of air
30 between the lower surface 10 of the floor covering and the upper surface

of the floor. This allows ventilation of the floor which is important if the floor is of concrete which has not cured completely.

With reference to Figure 2, a production line indicated at 30 starts at the point indicated at 31 where a non-woven support is unwound onto an inert carrier belt. A base coat is applied at 32 which is then heated in oven 34. The surface of the base coat is melted by infra red heaters 36 before it is embossed at 38. The base coated support is then cooled and inverted such that its lower surface faces upwards at 40 before being subject to a top-coating process where a top coat is applied at 42 and aggregate material is scattered onto the top coat at 44. The top coat is then heated in oven 46. The surface of the top coat is melted by infra red heaters 48 before being embossed at 50. The product is then cooled, cut to length and then wound at 52.

The preparation of a plastics floor covering according to the invention is illustrated in the following example:

EXAMPLE 1

A plastisol having the formulation given in Table 1 was prepared as described below:

TABLE 1

Ingredients	Weight/kg
Solvic 266F	10 (100 parts)
Jayflex DIDP	5 (50 php)
Microdol H155	6.5 (65 php)
BZ505	0.2 (2 php)
Blue BLP pigment	0.2 (2 php)

Wherein Solvic 266SF is a PVC polymer manufactured by Solvay; Jayflex DIDP is a di-isodecyl phthalate plasticiser manufactured by Exxon; Microdol H155 is a calcium magnesium carbonate manufactured by Omya; BZ505 is a liquid barium zinc preparation containing organic
5 barium compounds and phosphite manufactured by Witco; Blue BLP pigment is a phthalocyanine blue pigment manufactured by Ciba Pigments.

10 The ingredients were weighed in to a 50 litre steel vessel and mixed by a suitable mixer using a trifoil shaft at 100 rpm for 4 minutes and a dissolver shaft at 1800 rpm for 2 minutes. Aluminium oxide particles (from Washington Mills) size F40 (FEPA Standard 42-GB-1984 measurement) were weighed into each plastisol (10% w/w) and mixed.

15 The plastisol thus produced was used to make a floor covering according to the invention. It was spread coated at 1mm by knife over roller onto a non-woven support, and then fused at 185°C for 3 minutes and embossed with the stud pattern. The PVC sheet was then reversed and cooled, a second coating of the plastisol was then spread coated at 1mm onto the
20 non-embossed surface. Particles of silicon carbide (F36 FEPA-Standard 42-GB-1984), coloured quartz (nominally 0.7-1.2mm) and plasticised pigmented PVC particles (nominally 2.5mm) were scattered onto the surface at an approximate rate of 100gm⁻², using standard equipment known within the industry. The product was then fused at 175°C for 3
25 minutes and was embossed with a sufficient enough nip-gap (i.e. space between emboss rollers which determines the pressure applied) to apply the required surface finish, but without destroying the stud pattern on the reverse. This was achieved by the use of IR lamps to heat and soften the surface enough to allow a light pressure emboss to apply enough force to
30 impress a pattern on the surface. The material was then cooled and wound onto a core.

CLAIMS

1. A ventilating decorative floor covering for loose laying on the upper surface of a floor which floor covering has a decorative upper surface and a lower surface on which are formed one or more studs which, in use, provide an air gap between the lower surface of the floor covering and the upper surface of the floor sufficient to ventilate the floor.
2. A floor covering as defined in Claim 1 wherein the lower surface of the floor covering is chemically or mechanically modified to ensure that there is adequate grip between the lower surface of the floor covering and the floor to which it is applied.
3. A floor covering as defined in Claim 2 wherein the modification is in the form of a softening and/or a roughening of the lower surface.
4. A floor covering as defined in Claim 3 wherein the lower surface is roughened by including a blowing agent in the material from which the lower surface of the floor covering is formed.
5. A floor covering as defined in Claim 3 wherein the lower surface is softened by including additional plasticiser or a chemical blowing agent in the material from which the lower surface of the floor covering is formed.
6. A floor covering as defined in any one of the preceding Claims which includes one or more particulate materials in the upper surface of the floor covering to provide slip resistance.

7. A floor covering as defined in Claim 6 wherein a particulate material is embedded in the upper surface of the flooring material which material is at least partially proud from the upper surface to achieve adequate slip resistance.

5

8. A floor covering as defined in any one of the preceding Claims which is preferably a plastics flooring material.

9. A floor covering as defined in Claim 8 which includes a plastics material which is a PVC, a plasticised PVC, a polyurethane, an epoxy resin, an acrylic, a plasticised acrylic, a polyurefin, a polyester, and/or other suitable thermoplastics, preferably the floor covering includes a PVC plastisol.

10. A floor covering as defined in Claim 8 or Claim 9 which includes a plastics material preferably in an amount of 100 to 200 php, a blowing agent preferably in an amount from 0 to 2 parts per hundred parts of plastics material (php), filler preferably in an amount of from 0 to 100 php, thermal stabiliser preferably in an amount of from 1 to 3 php, and/or a pigment preferably in an amount of from 1 to 3 php.

11. A floor covering as defined in any one of the previous Claims wherein the floor covering is a heterogenous floor covering.

12. A floor covering as defined in any one of the previous Claims which includes a wear layer

13. A floor covering as defined in any one of the preceding Claims wherein the upper surface includes a decorative element such as a pigment and/or a PVC chip.

14. A floor covering as defined in any one of the preceding Claims which includes a support, more preferably a reinforcing support.

5 15. A method of laying a slip resistant floor covering to decorate and ventilate a concrete floor having an upper surface which method includes loose laying on the upper surface of the floor a floor covering having a decorative slip resistant upper surface and a lower surface on which are formed a plurality of studs and/or other suitable profiles which provide an
10 air gap between the lower surface of the floor covering and the upper surface of the floor sufficient to ventilate the floor.

16. A method as defined in Claim 15 wherein the floor covering is as defined in any one of claims 1 to 14.

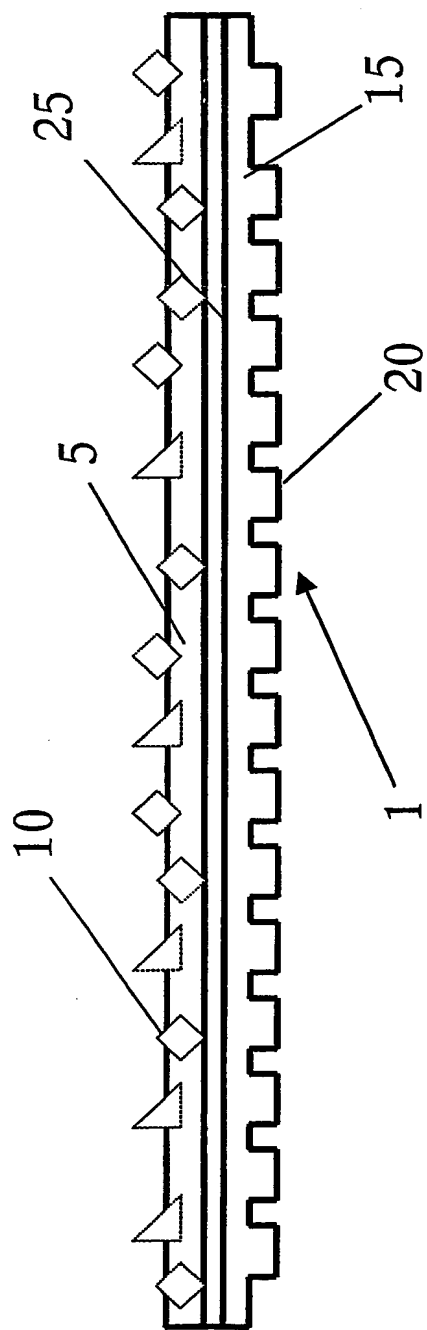


FIGURE 1

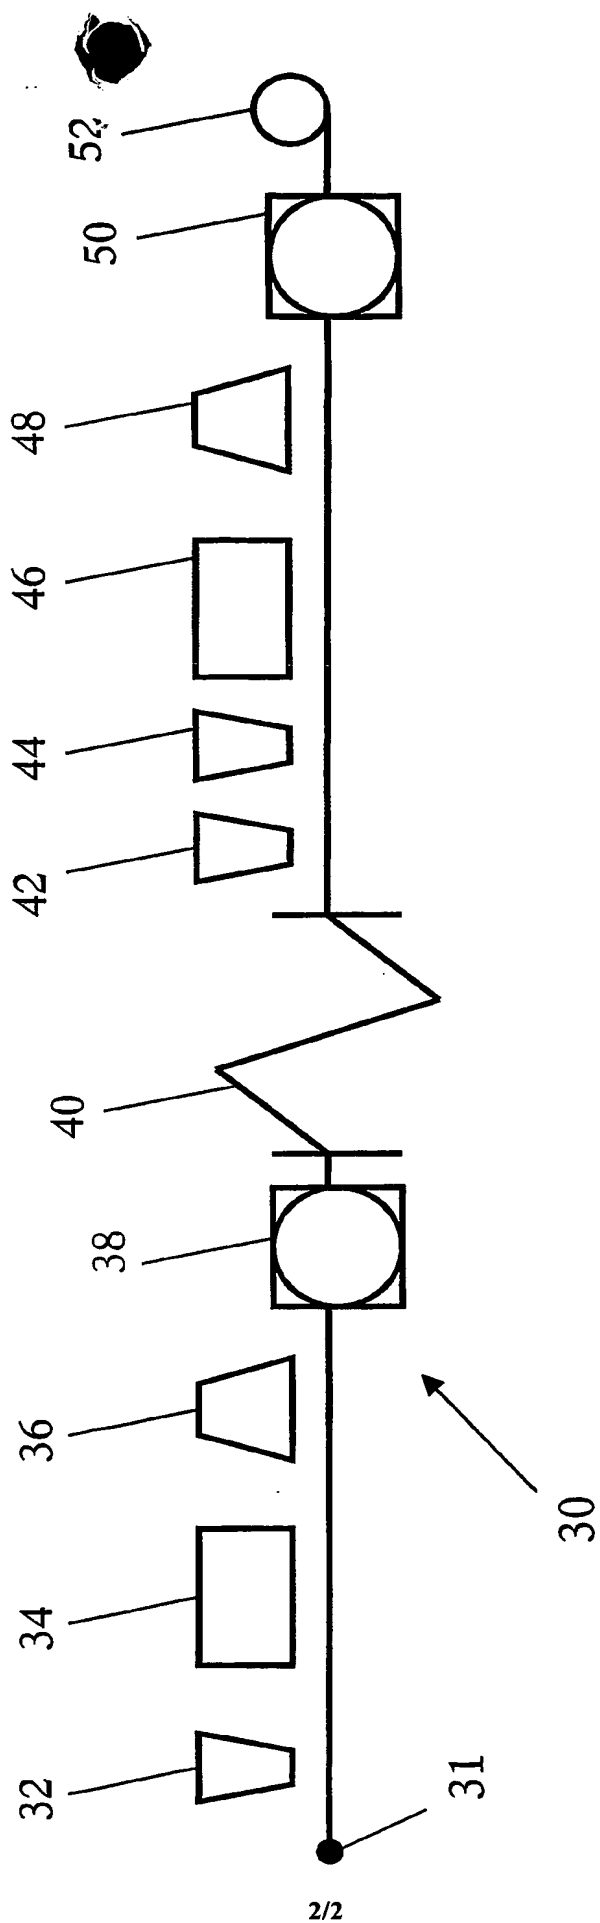


FIGURE 2

INTERNATIONAL SEARCH REPORT

Internat. Patent No.

PCT/GB 03/02563

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E04F15/10 E04F15/02 D06N7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E04F D06N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 752 498 A (BORDEN DECORATIVE PRODUCTS INC) 8 January 1997 (1997-01-08) column 1, line 7 column 4, line 15 column 5, line 8 -column 6, line 15 column 8, line 38 -column 12, line 45; figure 2B	1-4,8,9, 11-16
X	US 5 950 378 A (ADAMS JR JIMMY L ET AL) 14 September 1999 (1999-09-14) column 2, line 52 -column 4, line 53; figures 1,3	1,8,9, 11,12, 14-16
X	US 4 018 025 A (COLLETTE RODERICK E) 19 April 1977 (1977-04-19) column 1, line 25-39 -column 3, line 2-12; figure 3	1,14-16
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 August 2003

Date of mailing of the international search report

02/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bouyssy, V

INTERNATIONAL SEARCH REPORT

Internat Patent No

PCT/GB 03/02563

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 690 863 A (PERCY OAKLEY) 29 April 1953 (1953-04-29)	1, 14-16
Y	page 1, line 60 - line 81; figures ---	5-13
Y	WO 00 42274 A (MASTERS KAREN ALEXANDRA ; SHORTLAND ADRIAN JOHN (GB); ALTRO LTD (GB) 20 July 2000 (2000-07-20) cited in the application page 1 -page 10; figure 1 ---	5-13
A	GB 1 017 292 A (US RUBBER CO) 19 January 1966 (1966-01-19) page 3, line 82 - line 122 ---	5
A	EP 0 583 146 A (ALTRO LTD) 16 February 1994 (1994-02-16) page 4, line 44 - line 48; figure 2 -----	13

INTERNATIONAL SEARCH REPORT

Internat. Appl. No.

PCT/GB 03/02563

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0752498	A	08-01-1997	US 5676787 A	14-10-1997
			AT 243284 T	15-07-2003
			AU 4060195 A	19-12-1996
			CA 2164795 A1	08-12-1996
			CN 1142430 A ,B	12-02-1997
			DE 69628700 D1	24-07-2003
			EP 0752498 A2	08-01-1997
			JP 8332692 A	17-12-1996
			US 5866220 A	02-02-1999
US 5950378	A	14-09-1999	NONE	
US 4018025	A	19-04-1977	NONE	
GB 690863	A	29-04-1953	NONE	
WO 0042274	A	20-07-2000	AU 1992100 A	01-08-2000
			CA 2359852 A1	20-07-2000
			EP 1149217 A1	31-10-2001
			WO 0042274 A1	20-07-2000
			GB 2362663 A ,B	28-11-2001
			JP 2002535517 T	22-10-2002
			NZ 513420 A	28-02-2003
			US 6579610 B1	17-06-2003
GB 1017292	A	19-01-1966	US 3192294 A	29-06-1965
			DE 1629805 A1	28-01-1971
			FR 1429139 A	18-02-1966
EP 0583146	A	16-02-1994	AU 4450393 A	17-02-1994
			CA 2103604 A1	13-02-1994
			EP 0583146 A1	16-02-1994
			JP 6212774 A	02-08-1994